
Installing your Mountable Bottle Opener

Newer models of the PBC should have the mounting holes pre-drilled. If your PBC came in a black box, you should be good to go. If your PBC came in a brown box, or you plan to install multiple openers, you will need to drill the mounting holes. This document is meant as a guide to help minimize the potential risk of damaging the porcelain coating on your barrel.

It is important to note and be aware that in drilling said holes, you do so at your own risk. The Pit Barrel® Cooker Company can assume no liability relating to the physical alteration of your barrel.

Placement / Template

Pre-drilled holes are situated toward the back, approximately half way in between the rebar holes and the horseshoe, and centered between the top rim and first horizontal band. This page can be printed and used as a template by aligning it on your PBC as indicated.




Print this page at 100% scale and tape it to your PBC as shown here

The Right Drill Bit is Key!

You will need a 3/16" (or 5mm) high-quality, high-speed drill bit. As the PBC is porcelain (glass) coated, quality of the drill bit is key to preventing damage. Cobalt bits are recommended, and should be available at your local hardware store for \$4-\$6. USE A NEW BIT! It is the only way to be certain that it is free from degredation resulting from prior use.


Align this edge under the rim of your PBC

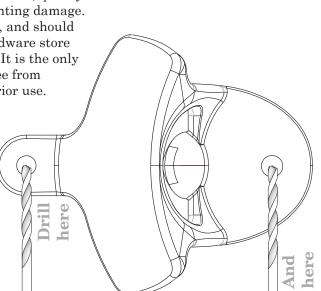

While you are drilling, ensure that you keep the drill bit straight and perpendicular to the barrel.

DO NOT wallow the hole!

Straight-in and Straight-out

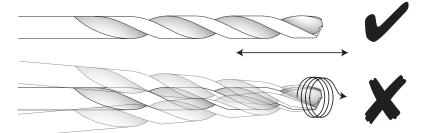

Drilling

 \bigcirc

PRIOR TO DRILLING

Ensure that the page has printed at 100% scale by placing your opener on the image to the left and verifying that the holes match.

- Start slowly until the tip has created an indentation large enough to prevent it from wandering. Do not mark the hole with a punch or any other "impact" method.
- Once the bit is seated and location marked, you can now remove the template and increase the drill to full speed.
- 3. Apply light to moderate pressure to keep the bit in place and progress.



If you have any questions, do not hesitate to reach out:

sales@pitbarrelcooker.com (502) 228-1222